

ReneSola

156 Series Monocrystalline Solar Module

250W, 255W, 260W



High Module Conversion Efficiencies



Easy Installation and Handling




Mechanical Load Capability of up to 5400 Pa



Conforms with IEC 61215:2005,
IEC 61730: 2004, UL 1703 PV Standards



ISO9001, OHSAS18001, ISO14001 Certified

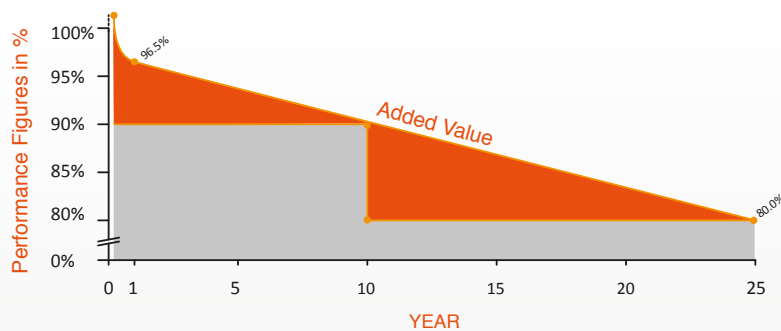

10-year
material & workmanship


25-year
linear power output



APPROVED PRODUCT




Dimensions

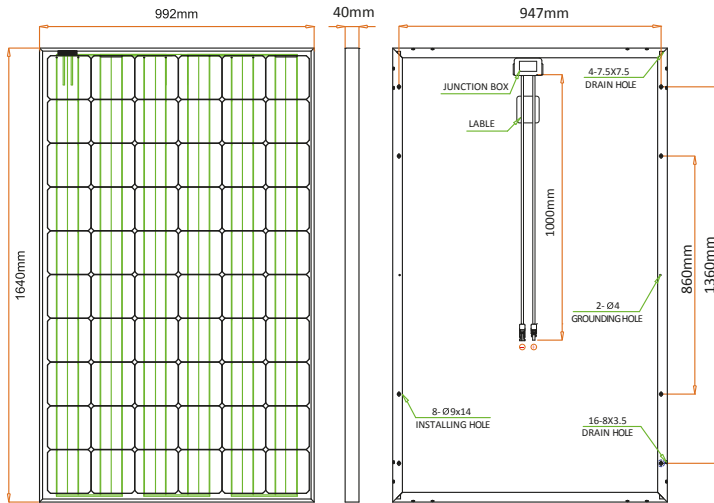

Drawing Only for Reference

I-V Curves

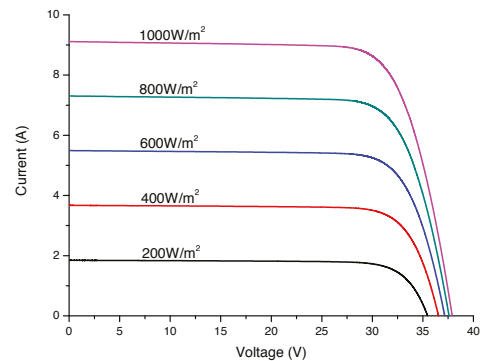

Varied Irradiation Efficiencies

Irradiance	200W/m ²	400W/m ²	600W/m ²	800W/m ²	1000W/m ²
Efficiency	15.9%	16.2%	16.2%	16.1%	16.0%

Electrical Characteristics STC

	JC250S-24/Bb	JC255S-24/Bb	JC260S-24/Bb
Maximum Power (P _{max})	250 W	255 W	260 W
Power Tolerance	0 ~ +5W	0 ~ +5W	0 ~ +5W
Module Efficiency	15.4%	15.7%	16.0%
Maximum Power Current (I _{mp})	8.32 A	8.44 A	8.55 A
Maximum Power Voltage (V _{mp})	30.1 V	30.2 V	30.4 V
Short Circuit Current (I _{sc})	8.87 A	8.99 A	9.10 A
Open Circuit Voltage (V _{oc})	37.5 V	37.6 V	37.7 V

Values at Standard Test Conditions STC (Air Mass AM1.5, Irradiance 1000W/m², Cell Temperature 25°C)

Electrical Characteristics NOCT

	JC250S-24/Bb	JC255S-24/Bb	JC260S-24/Bb
Maximum Power (P _{max})	184 W	188 W	191 W
Maximum Power Current (I _{mp})	6.57 A	6.62 A	6.66 A
Maximum Power Voltage (V _{mp})	28.0 V	28.4 V	28.7 V
Short Circuit Current (I _{sc})	7.15 A	7.21 A	7.28 A
Open Circuit Voltage (V _{oc})	35.1 V	35.2 V	35.3 V

Values at Normal Operating Cell Temperature, Irradiance of 800 W/m², spectrum AM 1.5, ambient temperature 20°C, wind speed 1 m/s

Mechanical Characteristics

Cell Type	156 x156 mm Monocrystalline, 60 (6x10) pcs in series
Glass	High Transmission, Low Iron, Tempered Glass
Frame	Anodized Aluminum Alloy
Junction Box	IP65/IP67 rated, with bypass diodes
Dimension	*1640 x 992 x 40 mm
Output Cable	4 mm ² (EU)/12 AWG (US), 1000 mm
Weight	19 Kg
Installation Hole Location	See Drawing Above

Characteristics

Temperature Coefficient of V _{oc}	-0.31%/°C
Temperature Coefficient of I _{sc}	0.03%/°C
Temperature Coefficient of P _{max}	-0.43%/°C
Nominal Operating Cell Temperature (NOCT)	45°C±2°C

Packing Information

Container	20' GP	40' GP	40' HQ
Pallets per Container	12	28	28
Pieces per Container	300	700	770

Rev No: JC/T05/2012.11 *Contact ReneSola for tolerance specification
CAUTION: All rights reserved. Design and specification are subject to change without prior notice.

Maximum Ratings

Operating Temperature	-40°C ~ +85°C
Maximum System Voltage	1000VDC (EU) / 600VDC (US)
Maximum Series Fuse Rating	20A (EU) / 15A (US)